

UP to 14.0 SEER!!

ADDITIONAL CERTIFIED
MATCHES ADDED



WHSC Series HIGH EFFICIENCY THRU-THE-WALL CONDENSING UNIT 1.0 thru 2.5 Tons



(Unit shown without architectural grille)



(Unit shown with architectural grille)

Application -

The space and cost saving features of through the wall split condensing units continue to be important to architects, engineers, and multi-family developers. However, today's projects demand higher efficiency equipment, and until now, the highest efficiency available for through the wall units was 12 SEER.

First Co. is proud to introduce the High Efficiency **WHSC** Series. By using the industry's latest state-of-the-art components, such as ECM motors, high efficiency compressors, and enhanced coil technology, the **WHSC** condensing unit achieves **up to 14.0 SEER** when combined with its matching First Co. high efficiency air handlers. In addition, the condensing unit's unique propeller-type fan blade operates at a slower speed and is much quieter than traditional squirrel cage type blowers.

Through-The-Wall vs Conventional Condensing Units -

- Lower Installation Costs - **WHSC** condensing units install on the same floor as the apartment, townhome, or condominium resulting in considerable first cost savings in refrigerant, refrigerant piping, and electrical wiring compared to condensing units installed on the ground or roof.
- Easier to Service - Being located on the same floor as the apartment, town home, or condominium, service and routine maintenance of the **WHSC** is much easier and can be performed by one person.
- Through the wall units eliminate theft
- No costly landscaping needed to hide the units
- No condensing unit support pads required
- No additional roof support expenses
- No chaseways to roof or ground needed for refrigerant lines

WHSC Series units are sold and intended for use only with blower coil and air handler units with ECM motors.

Factory Matched Indoor Air Handlers -

First Co. offers a complete line of indoor air handlers, factory matched and performance-certified to DOE. An air handler style is available for every application, including closet, recessed wall, and recessed ceiling installations.

WHSC Features -

- High efficiency ECM motor
- Unique cabinet design - unit side panels fit inside rather than outside the base pan to improve water containment on the sides of the cabinet
- High efficiency scroll or reciprocating R-410A compressor
- High pressure switch
- Propeller type fan with ECM motor - Moves more air over the condenser coil at lower operating watts than standard "squirrel cage" type blower
- Lower RPM fan motor - Much quieter operation
- Factory charged with R-410A refrigerant - charge will need to be field adjusted
- Sloped base pan - Positive water drainage from the unit to the building exterior
- Plastic coated coil guard
- Cabinet has a durable, baked on powder coating

WHSC Series

ELECTRICAL DATA 208/230V - 1PH - 60 Hz						
UNIT MODEL	COMPRESSOR		CONDENSER FAN		MIN. CIR. AMPACITY	MAX. OVERCURRENT PROTECTION
	LRA	RLA	FLA	HP		
12WHSC	25	4.7	2.8	1/3	9	15
18WHSC	48	9.0	2.8	1/3	14	20
24WHSC	58.3	12.8	2.8	1/3	19	30
30WHSC	73	14.1	2.8	1/3	21	30

CERTIFIED COMBINATION RATINGS (1)			
MODEL	CERTIFIED SEER	INDOOR MODEL	MBTUH CLG.
12WHSC	13.0	12CDXQX, (-HW)	11.2
	13.0	12CDXX-HW	11.2
	13.0	12HXX	11.2
	13.0	12UCX	11.4
	13.0	12UCX-HW	11.2
18WHSC	13.0	12UCXQ	11.2
	14.0	25CLX	18.8
	13.0	19UCX	18.0
	13.0	25UCX	18.0
	13.0	19HXX	18.0
	13.0	25CDXQX, (-HW)	18.0
24WHSC	13.0	25UCXQB, (-HW)	18.0
	12.0	19CDXQX, (-HW)	18.0
	12.0	19UCXQB, (-HW)	18.0
	14.0	37CLX	24.0
	13.0	37UCX	23.5
	13.0	37HXX	23.5
	13.0	31CDXQX, (-HW)	24.0
30WHSC	13.0	37UCXQB, (-HW)	24.0
	12.0	25UCX	23.2
	12.0	31HXX	23.2
	12.0	25CDXQX, (-HW)	23.0
	12.0	25UCXQB, (-HW)	23.0
	14.0	37CLX	28.8
30WHSC	13.0	38UCX	28.0
	13.0	38UCXQB, (-HW)	28.0
	12.0	37UCX	27.8
	12.0	37HXX	27.8


- (1) SEER and capacity information are combination ratings certified by First Co. to the U.S. Department of Energy. DOE maintains a public database that includes a complete listing of all appliance certifications. To view (and search) this listing, go to: <http://www.regulations.doe.gov/certification-data/>
- (2) Contact First Co. for certified A coil combinations.

OPTIONAL INSULATION JACKET					
PART NUMBER	USE WITH	DESCRIPTION	DIMENSIONS		
			H	W	D
9WHJ-1	All WHSC models	Insulation jacket	46-1/4	29-1/2	12



Insulation Jacket

Catalog No. WHSC718 (replaces whsc618)

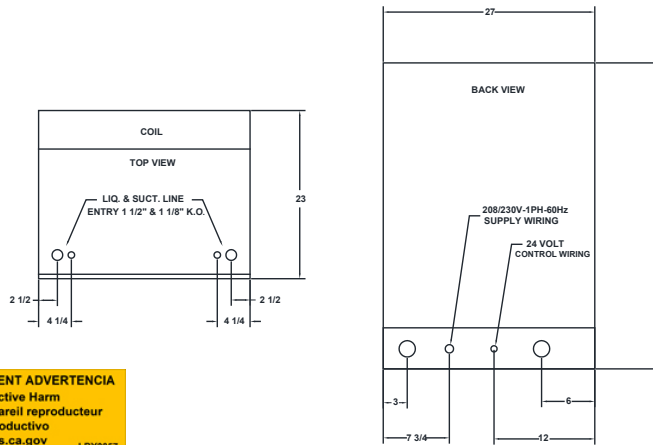

PHYSICAL DIMENSIONS					
UNIT MODEL	H	W	D	LIQ/SUCT. LINE CONN. (SWEAT)	APPROX. SHIP WT.
12WHSC	44	27	23	3/8 O.D. / 5/8 O.D.	235
18WHSC				3/8 O.D. / 3/4 O.D.	255
24WHSC					260
30WHSC					270

OPT. ARCH. GRILLE (FIELD INSTALLED)				
PART (1) NUMBER	USE WITH	DIMENSIONS		
		H	W	D
G212A G212PPA G212S	All WHSC models	44	27	23

Notes:

- "A" = Clear Anodized
"PPA" = Paint Prepared Aluminum
"S" Custom Painted
- Grille screws to the "face" of the condensing unit in place of the factory wire guard.
- Grilles can be factory painted almost any color. Contact the factory for additional information and cost.

OPTIONAL INSTALLATION SLEEVE (See matching grille)					
PART NUMBER	USE WITH	DESCRIPTION	DIMENSIONS		
			H	W	D
9WHS-1	All WHSC models	Sleeve installs in rough-in to facilitate condensing unit installation and removal for service	45-1/2	27-1/2	13

In keeping with its policy of continuous progress and product improvement, First Co. reserves the right to make changes without notice. Maintenance for all First Co. products is available under "Product Maintenance" at www.firstco.com.



Shown with Insulation Jacket Installed